



Dajulong 100  
同透商用卷材地板

**DajuLong**<sup>®</sup>  
大巨龙弹性地板

# Dajulong 100

Dimension: 2.0mm x 2m x 20m



TJ-6802

# Dajulong 100

Dimension: 2.0mm x 2m x 20m



TJ-6802



TJ-6805



TJ-6851



TJ-6801




TJ-6803



TJ-6804

# Dajulong 100

规格: 2.0mm × 2m × 20m

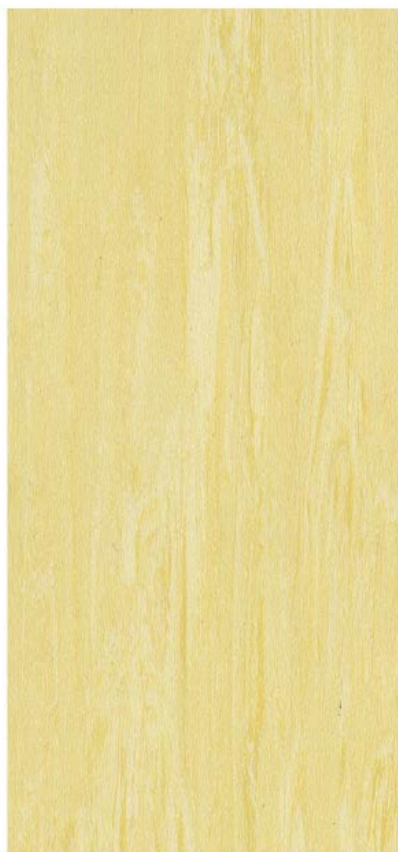

TJ-6806



TJ-6822



TJ-6823



# Dajulong 100

Dimension: 2.0mm x 2m x 20m



TJ-6831




TJ-6832



TJ-6833

# Dajulong 100

规格: 2.0mm × 2m × 20m

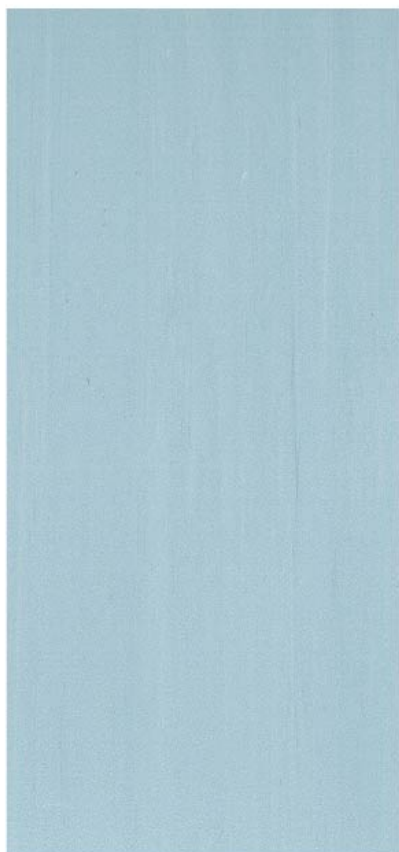


TJ-6841



TJ-6845



TJ-6846

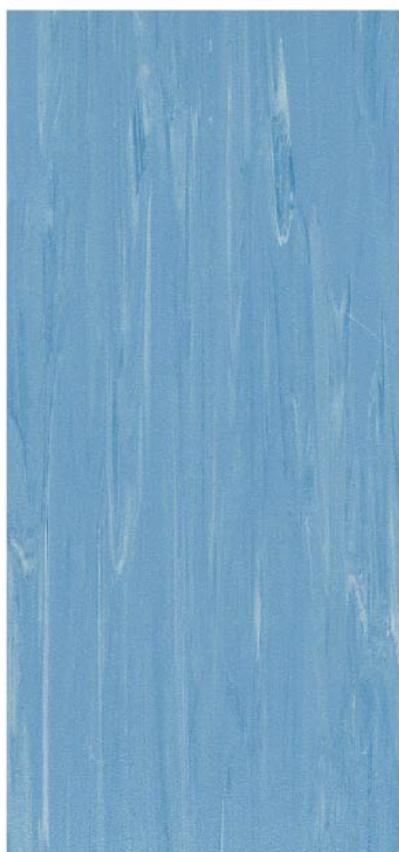

TJ-6842



TJ-6843



TJ-6844

# Dajulong 100

规格: 2.0mm × 2m × 20m



TJ-6811



TJ-6816



TJ-6812



TJ-6813



TJ-6814



TJ-6815

# Dajulong 100

## 同透商用卷材地板



| Description 规格      | Standard 标准 | Result 结果 |
|---------------------|-------------|-----------|
| Total thickness 总厚度 | EN 428      | 2.0 mm    |
| Width 宽度            | EN 426      | 2 m       |
| Length of sheet 卷长  | EN 426      | 20 m      |

### Classification 类别

|                            |               |                     |
|----------------------------|---------------|---------------------|
| Fire rating 防火等级           | GB 8624-2012  | B1                  |
| Toxic testing 有害物质检测       | GB 18586-2001 | Good 合格             |
| Electrical resistance 抗电阻性 | EN 1081       | >10 <sup>9-10</sup> |
| Slip resistance dry 防干滑性   | EN 13893      | ≥0.3                |
| Slip resistance wet 防湿滑性   | EN 51 130     | R9                  |

### Performances 性能

|                                      |                  |              |
|--------------------------------------|------------------|--------------|
| Castor chair test 轮压测试               | EN 425           | No damage 合格 |
| Colour fastness 颜色稳定性                | EN ISO 105 - B02 | ≥6           |
| Chemical products resistance 抗化学性    | EN 423           | Good 好       |
| Dimensional stability 尺寸稳定性          | EN 434           | ≤0.40%       |
| Curl resultant to heat 加热翘曲          | EN 434           | ≤4 mm        |
| Sound reduction 消音率                  | EN ISO 717/2     | Approx. 4 dB |
| Residual indentation 残余凹陷度           | EN 433           | 0.03mm       |
| Anti-bacterial and fungicidal 抗菌防霉性能 |                  | Good 好       |
| VOC 挥发物排放量                           |                  | <10          |
| Surface treatment 表面处理               |                  | PUR          |

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告

